


325mm



790mm

<b>Product</b>	Shida 2
<b>Lamp type</b>	240V G9
<b>Supplied lamp</b>	3.5W 3000K dimmable LED x 2
<b>Drop length</b>	As specified (minimum 1400mm)
<b>Weight</b>	5kg
<b>Ceiling mount</b>	Recessed
<b>Finishes</b>	Brass and plated finishes (Pictured in Dark Bronzed Brass).

**Brass finishes**



Dark Bronzed Brass



Bronzed Brass

**Plated finishes**




Chrome



Brushed Nickel


\*Each hand finished surfaces are unique and variations may occur.

### Installation - recessed ceiling mount

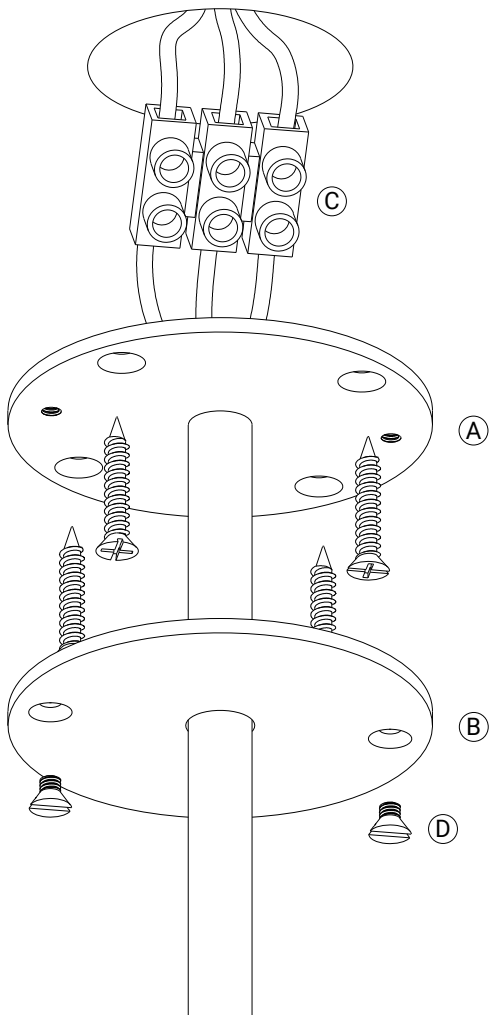

1. Make sure to turn off the main power before installation.
2. Drill  $\varnothing$  35 - 50mm hole to the ceiling to allow the terminal block (C) to fit through.
3. Connect live wires to the fitting (A) using the terminal block (C) supplied.
4. Place wiring into the ceiling, and attach the fitting (A) to the ceiling by appropriate screws (not included).
5. Carefully slide up the cover plate (B), then secure it with the ceiling mount screws (D).
6. Insert the supplied bi-pin lamps to the lampholders.
7. Screw in the glass shades to the lampholders.
8. Turn on the main power.

**Caution: Installation must be performed by certified electrician.**

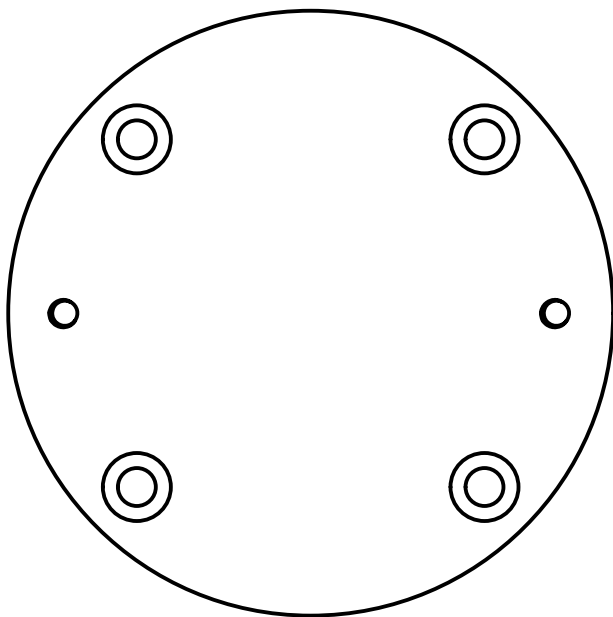

74mm



3 mm

$\varnothing$  100mm